



H.O.G.

HIGH OUTPUT GRINDER



THE
INDUSTRY'S
FASTEST
MEANS OF
HARDBAND
REMOVAL

OPERATIONAL ADVANTAGES:

- Adjustable depth of cut
- “Anti-Walking” system (pipe will not walk while grinding)
- High speed removal with high speed roller jack stands
- Portable with leveling control (will fit in a standard 3/4 ton pickup)
- Microprocessor controlled guide system for precise operator control

KEY FEATURES:

- O.D. ranges 2”-12”, tubing, drill pipe, HeviWeight, drill collars, CW pads
- Fast tilting for grinding on 18° taper with no equipment changes
- Corrects and removes eccentrically worn hardbanding
- Removes hardbanding on non-eccentric tool Joints



DAMAGED



FLUSH



FULL REMOVAL

CONTACT:

Paul Bosman
pbosman@arncotech.com / +1 832-214-5208

www.hardbanding.com




POWER REQUIREMENTS:	480V, 3-Phase, 30A, 22KW
WEIGHT:	2145 lbs machine, 2954 lbs with field accessories
DIMENSIONS:	65" D x 66" W x 76.5" H
GRINDING WHEEL:	12" high efficiency hardband removal formula

Proprietary suspension system for eccentric wear removal (patent pending)

*Benefits vs plasma removal and arc gouging removal:
No post-grind cleanup, reduced heat input*

Triple your removal speed vs other portable HB removal machines

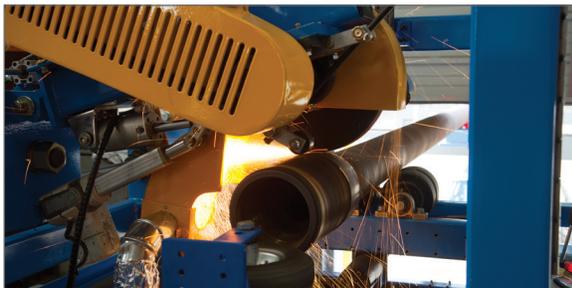

CONTACT: Paul Bosman
pbosman@arncotech.com / +1 832-214-5208

www.hardbanding.com